
ATS1238

Wireless DGP supporting 868Gen2 sensors and PIRCam

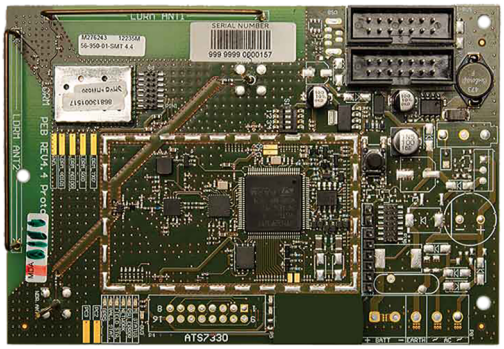

Details

- Expands the Advisor Advanced panel with 32 wireless zones, including PIR Cameras
- Uses the KGS Security "Learn Mode" 868MHz Wireless Transmitter Sensors
- Installed into the Large Poly housing
- Features spatial diversity to minimize wireless signal nulls or dead spots and has a nominal open-air receiving range of 460m
- If dead spots need to be eliminated a KGS Fire & Security 868MHz repeater may be used for 868Gen2 sensors
- Powered from MI bus interface of the Advisor Advanced
- Up to 16 Fob buttons may be programmed for users to arm and disarm or to control relays

ATS1238

Wireless DGP supporting 868Gen2 sensors and PIRCam

Technische specificaties

General

Expander type	Trådløs udvidelse
Product line	Advisor Advanced, Axon
Connection type	Databus connection

System

Addressing	Dip-Schalter

Wireless

Operating frequency	2.4 GHz, 868 MHz AM
Wireless open-air range	400 m

Electrical

Power supply type	12 VDC
Integrated power supply	No

Environmental

Environment	EN50130-5 ; Klasse II - Indendørs (generelt)

Regulatory

Compliancy	CE
Certification	CE, EN50131 Grad 2, INCERT

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57