# NS3550-8T-2S-V2

## 8-port + 2-SFP Industrial Gigabit Managed Switch

### Overview

The IFS® NS3550-8T-2S-V2 is an Industrial Gigabit Managed Switch equipped with eight 10/100/1000Mbps RJ45 ports and two 100/1000Mbps SFP (fiber) uplink ports. These are fully managed Layer 2+ switches providing a robust industrial hardened design that provides for rapid operational recovery in the event of a network or power system failure.

### Layer 2+ Managed Switch

The IFS Industrial Gigabit Managed Switch Series supports advanced features including IEEE 802.1Q VLAN, GVRP, port link aggregation, QoS, broadcast storm control and MAC address filtering. The series also includes IGMP snooping and querying multicasting for media operations and bandwidth utilization to fit a variety of applications. Via aggregation of supporting ports, the series allows the operation of high-speed trunk operation combining multiple ports. A maximum of four ports can be assigned for four trunk groups and support fail-over as well. Additionally, its standards-compliant implementation ensures interoperability with equipment from other vendors.

### Industrial-grade Network Redundancy and Recovery

These switches not only incorporate the industry standard Rapid Spanning Tree Protocol (IEEE 802.1w RSTP), but also an advanced Industrial Fail-Safe (IFS) technology accommodating multiple redundant ring topologies and improved network recovery time of less than 20ms. The switches incorporate a redundant power supply system to further enhance network reliability and uptime. Ideal for use in implementing highly fault-tolerant ring and mesh network architectures, these switches are well suited for harsh environments such as industrial security, factory automation and intelligent transportation systems (ITS).

### Robust Hardened Design

With an IP-30 rated enclosure, IFS Industrial Gigabit Managed Switches provide a high level of immunity against electromagnetic (EMI) and radio-frequency (RFI) interference typically found in industrial environments. This series of switches comply with IEC60068-2-xx standards for free-fall, shock, and vibration and operate in -40° C to 75° C temperatures found in difficult environments such as plant floors or in curbside traffic control cabinets.




### Détails

- 8-port 10/100/1000Base-T
- 2-ports SFP (fiber) 100/1000Base-X
- RS-232 DB9 console interface for basic switch management and setup
- High-performance Switch Architecture
- Up to 20Gbps non-blocking switch fabric
- 9K bytes Jumbo frame support
- 8K MAC address table, automatic source address learning and ageing
- IGMP (v1/v2/V3) Snooping, up to 255 multicast Groups with IGMP Querier mode support, and MLD (v1/v2) Snooping, up to 255 multicast Groups with MLD Querier mode support
- VLAN Support - up to 255 VLANs groups out of 4094 VLAN IDs, MVR (Multicast VLAN Registration), Voice VLAN, MAC-Based VLAN, Protocol-Based VLAN
- Quality of Service (QoS), 802.1p priority, 802.1Q VLAN tag, DSCP/TOS field in IP Packet
- IEEE 802.3ad LACP / Static Trunk, Supports 5 groups of 8-Port trunk support
- Advanced Security
- MAC Filtering and Source IP/MAC address port-binding
- Circuit protection prevent power interference between ports
- Robust Hardened Design
- IP30 metal enclosure, DIN Rail and Wall Mount Design
- Wide operating temperature range of -40°C ~ +75°C

# NS3550-8T-2S-V2

## 8-port + 2-SFP Industrial Gigabit Managed Switch

## Spécifications techniques

### General

| | |
|---|---|
| Fast ring | Yes (ERPS) |
| Storm control | Broadcast, Multicast, Unicast |
| Security | 802.1x, ACL, RADIUS, Source MAC / IP address binding, TACACS+ |
| DHCP snooping | Yes |
| Fault relay output | Yes |

### Category

| | |
|---|---|
| Category | Industrial |
| Management | Managed |
| Managed | Yes |
| PoE | No |

### Physical ports

| | |
|---|---|
| No. of ports | 8 |
| Port type | Gig |
| Speed | Gigabit |
| Fiber port | 2 |
| Supported SFPs | S20/S25 series, S30/S35 series |
| SFP speed | 100/1000 |

### Switch Performance

| | |
|---|---|
| Switch fabric | 20 Gbps |
| Throughput (Mpps) | 14.88 |
| Mac table | 8 K |
| Jumbo frame support | 9 K |

### Layer 2 Functions

| | |
|---|---|
| Management interface | Console, Web, Telnet, SNMP 1,2,3, SSH/SSL secure access |
| IGMP snooping | 255 Group, Snooping v1, v2, v3 |
| IGMP query | Yes |
| VLAN, QoS | 256, yes |
| Access control list | 123 entries |

### Electrical

| | |
|---|---|
| Redundant power | Yes |
| Power supply type | 12 to 48 VDC |
| Power consumption | 20 W |

### Physical


| | |
|---|---|
| Physical dimensions | 88 x 135 x 56 mm |
| Net weight | 720 g |
| Colour | Black |
| Material | Metal |
| Mounting type | DIN-rail, Wall mount |
| Stackable | No |

### Environmental

| | |
|---|---|
| Operating temperature | -40 to +75°C |
| Environment | Indoor |
| IP rating | IP30 |

### Regulatory

| | |
|---|---|
| IEC standard | IEC60068-2-27 (shock), IEC60068-2-32 (free fall), IEC60068-2-6 (vibration) |

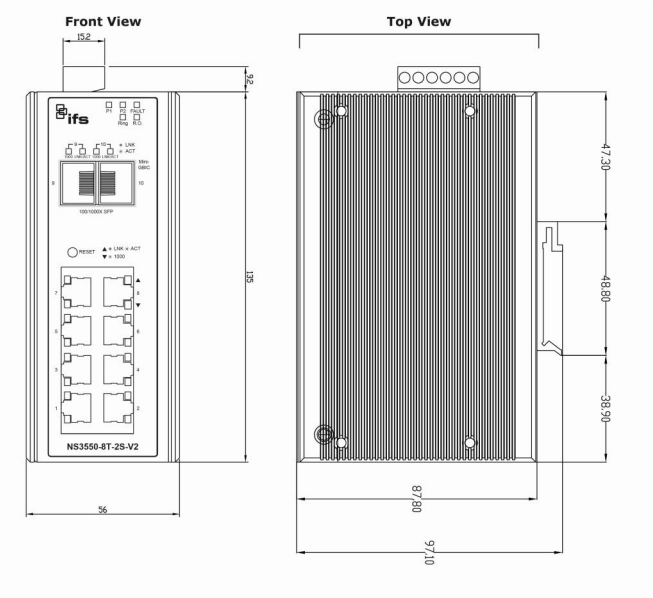


En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 20:20