STENTO-1023322330

Haut-parleur IP Box avec microphone (ZIPS-WC)

Overview

The ZIPS-WC IP speaker integrates with TruVision Navigator 9.2 (and newer) over the ONVIF protocol. This integration creates added value for video surveillance projects for perimeters, logistics centers, parking lots, retail stores, etc.
IP speakers can be installed along cameras to play event-based messages or sound messages can be triggered by an operator. This can prevent theft/vandalism and can deter criminal behavior, while keeping staff at a safe distance.

The Zenitel IP cabinet speaker is equipped with a Class D amplifier, powered via PoE, optimises performance for both voice and multimedia signals. Capable of delivering up to 103 dB SPL peak (1 kHz at 1m) and 99 dB SPL (1m) for continuous signals, it provides clear and reliable audio.
This wall-mounted speaker is ideal for indoor environments that require robust sound output while maintaining a focus on aesthetics. The high IP-rating also allows for installation outdoors.
Every speaker has a build-in memory that can store audio messages.

TruVision Navigator integration

Our VMS TruVision Navigator (version 9.2 and newer) supports the following features for Zenitel IP speakers:
 - Discover the IP speakers on the network
- An operator can start playback for sound messages
- Grouping of IP speakers is supported via the Logical View feature
- IP Speakers are added in the Event-Actions function, so that the desired audio message can be played for a camera event
- IP speakers can be shown on a map and sound messages can be played from the map
- As of version 9.4, the push-to-talk feature was added for supported IP speakers, enabling simultaneous communication across multiple speakers directly from the application.



Détails

- Haut-parleur IP à utiliser avec TruVision Navigator (à partir de la version 9.2)
- Mémoire pour stocker les messages audio
- Peut être utilisé à l'intérieur et à l'extérieur
- Alimenté par PoE
- Amplificateur intégré de classe D de 30 W
- Niveau de pression acoustique de 99 dB à 1m

STENTO-1023322330

Haut-parleur IP Box avec microphone (ZIPS-WC)

Spécifications techniques

Electrical

Power supply type	PoE
Power consumption	Max 12 W, idle 2 W
Frequency	90 Hz to 20 KHz

Physical

Physical dimensions	160 x 255 x 189 mm (H x W x D)
Net weight	2.31 kg
Colour	Reinweiß (RAL 9010)
Mounting type	Deckenmontage, Wandmontage
Mounting position	Decke, Wand
Housing material	ABS

Environmental

Operating temperature	-40 to +70°C
Relative humidity	<95% not condensing
Environment	Drinnen, Draussen
IP rating	IP66 / 67

Regulatory

Compliancy	CE, FCC

Audio


Internal speaker amplifier	30 W class D
Max. sound pressure level at 1 meter	103 dBA
Audio line out/induction loop signal	8 Ohm speaker out (powershare)
Switchable Mic/line in	1 (mic/professional line in level)

Network

Ethernet connection	RJ 45
Network protocols	IPv4 (with DiffServ), SIP, TCP, UDP, HTTPS, TFTP, RTP, DHCP, SNMP, ONVIF, CCoIP® , NTP, Power over Ethernet (IEEE 802.3 a-f) , Network Access Control (IEEE 802.1x)
Management and operation	HTTP/HTTPS (web configuration); DHCP and static IP
IP address information	Speaks IP address after system boot

Inputs/Outputs

General inputs/outputs	1
Outputs	12 mA as LED drivers
Change-over relay (NO+NC+COM)	48V nominal, max. 100VDC, 70VAC

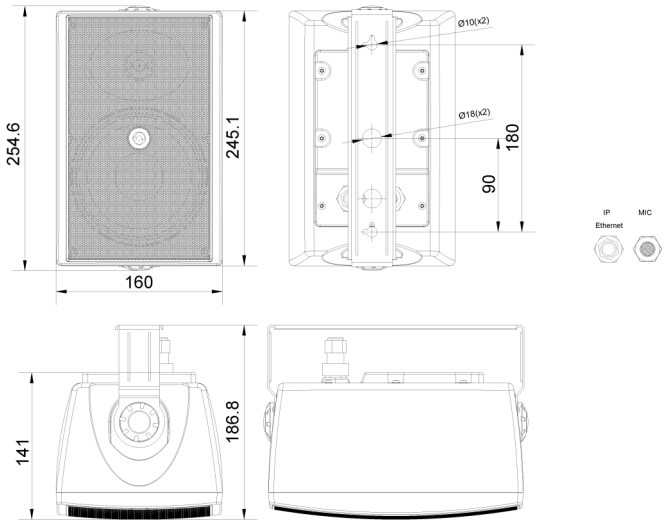

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57