# KE-DBA-RECW

## Akcesoria do inteligentnych czujek serii Excellence - podstawa wpuszczana (biała)

### General


The innovative Excellence range of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it’s a perfect match for exceptional overall performance.

The KE-DBA-RECW is an Excellence series, recess mount base accessory. It allows Excellence series detectors to be semi- recess mounted into ceiling tiles when installed into buildings with suspended ceilings. The detector's low profile is further reduced without any increased difficulty in wiring termination.

### Inatallation

For ease of installation, the base moulding passes through a clearance hole in the ceiling tile where it is automatically clamped between a retaining flange on the underside of the base moulding.

The standard Excellence series detector base fits snugly inside the fixture, completing the installation with the same feature set as for standard surface mount installation, including address tag mounting ability in two locations, head locking to avoid unauthorised detector removal, and device orientation features for quick, easy and secure detector placement.

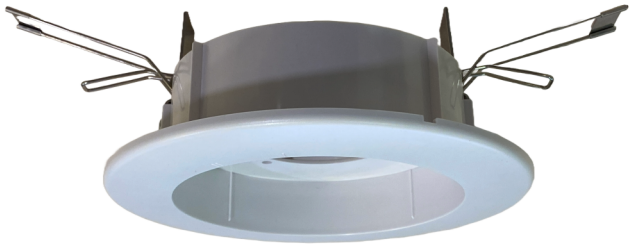

### Szczegóły

- Łatwy montaż za pomocą standardowych klipsów co pozwala uniknąć wiercenia.
- Zwiększa niski profil czujki dla instalacji wrażliwych na estetykę
- Obsługuje standardowe gniazda serii Excellence bez utraty funkcji
- Zintegrowana listwa wykończeniowa zakrywa nierówne boki otworu
- Podwójna lokalizacja znaczników adresu pozwala uniknąć pozycjonowania podstawy, aby znaczniki były widoczne

# KE-DBA-RECW

## Akcesoria do inteligentnych czujek serii Excellence - podstawa wpuszczana (biała)

## Specyfikacja techniczna

### General

| | |
|---|---|
| Compatibility | Gniazda serii Excellence |

### Physical

| | |
|---|---|
| Physical dimensions | 138 x 38 mm (Ø x W) |
| Net weight | 110 g |
| Colour | Traffic white (RAL9016) |
| Mounting type | Ceiling mount, Recessed mount |
| Cable entries | 1 |
| Material (body) | Moulded ABS |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Operating temperature | -10 do 75°C |
| Relative humidity | 0 do 95% bez kondensacji |
| Environment | Indoor |
| IP rating | IP42 |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 3, WEEE |
| Certification | CE |
| Environmental | EN60529 |

### Wyroby zgodne

| Kategoria | Odniesienie | Opis |
|---|---|---|
| Detection device | KE-DB3010W | Akcesoria do inteligentnych czujek serii Excellence - gniazdo standardowe |
| Detection device | KE-DBA-TAGW | ActivSense™ Intelligent Universal Base Accessory - Address Tag (White) |

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57