EVERON-3700-STEP-UP

Sempre ligado. Sempre atento.
EVERON-3700-STEP-UP

Product overview

Everon upgrade kit

This kit contains the components needed to change the panel from Master to Everon or from Advisor Advance to Everon.
The kit contains the panel-MBC and MBC mounting plate, Power Supply Unit (PSU), PSU mounting bracket, Cables/NTC/Stand-offs and User manual. There are no Keypads or housings, etc included in this kit.

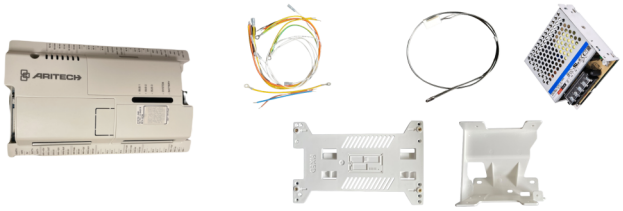

Detalhes

- Everon 3700-MBC e ATSX700-RETRO, num único kit.
- Everon 3700-MBC
- Placa de montagem MBC
- Power Supply Unit (PSU)
- Suporte de montagem da PSU
- Cabos, sensor NTC, suportes e manual do utilizador

EVERON-3700-STEP-UP

Sempre ligado. Sempre atento.
EVERON-3700-STEP-UP

Especificações técnicas

System

Product line	Everon
Product type	Integrated Access Control
Panel type	Hybrid
Kit	No
No. of keypads / readers	16
Data Gathering Panels (DGP)	15
No. of alarm groups	256
Specified cable	WCAT52 / WCAT54 ou equivalente

Inputs

Max no. of inputs	256
Onboard inputs	16
Inputs plug-in expansion	8
ATS1202 support	3

Outputs

No. of outputs	128
No. of onboard outputs	3 saídas electrónicas + 2 relés

Area

No. of areas	16

User/Cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	2000 até 65532
Max. no. of PIN codes	2000 até 65532

Access control

Standard doors on control panel	8
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	48

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, IP
Databus type	RS485

Event log

Alarm event log	14500
Access event log	20000

Electrical

Operating voltage	24 VDC
Mainboard current consumption	110 mA a 24 V (PSU), 160 mA a 12 V (bateria)
Max system current	950 mA a 13.8 V ±0.2 V
Max aux power current	3500 mA a 13.8 VDC ±0.4 V
Auto-reset fuses	3 (elétrico, 1,3 A por utilização)
Glass break fuses	1 (mains power, T-2A 230 VAC, lento)

Physical

Physical dimensions	199 x 140 x 45 mm
Net weight	405 g

Environmental

Operating temperature	-10 até +55°C
Relative humidity	95% sem condensação
Environmental Class	Class II, interior
IP rating	IP31

Regulatory

Compliancy	CE

Produtos compatíveis

Categoria	Referência	Descrição
Communication Devices	ATS7341	Módulo GSM para Everon e Ad. Advanced
Communication Devices	ATS7341-SIM	Mobilfunkmodul für Axon- und Advisor Advance-Zentralen, inklusive UltraSync-SIM-Karte für 4G-Netzwerke mit 2G-Fall Back
Keypad	ATS1125	Teclado Everon com leitor MIFARE, branco
Keypad	ATS1125-B	Teclado Everon com leitor MIFARE, Preto
Keypad	ATS1140	Ecrã tátil de 7" para a Adv Advanced/Everon

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57