# POC252-1CX-1P

## Switch End 1-Port 10/100Base-Tx koppar + 1 BNC Koax-port med PoE (at) ej övervakningsbar mediakonverterare (-40~75 °C) – ström 48 VDC – väggmontering

### Overview

The IFS® Power over Coax Network Switches and Media Converters by Interlogix® are designed to transmit both Ethernet data and PoE over coax cable up to 1 km (3,280 ft). This solution provides a cost-effective approach by reducing installation cost and increasing ROI by utilizing existing coax to migrate an existing analog video system to an IP video surveillance system.

The PoC Network Switches and Media Converters also provide built-in PD-alive monitor health and status of an IP camera. In addition, this solution eliminates the need for providing local power at an IP PoE camera location.




• The POC2502-8CXP-2T-2S is an 8-port Power over Coax Managed Switch that supplies data and power transmission on coax via BNC ports. In addition, the two RJ45/SFP Gigabit combo ports provide a connection to an Ethernet network.

• The POC2502-16CXP-2T-2S is a 16-port Power over Coax Managed Switch. The switch supplies data and power transmission on coax via BNC ports as well as two RJ45/SFP Gigabit combo ports for connection to an Ethernet network.

• The POC252-1CX-1P Power over Coax Media Converter is for use at the camera end to convert the data/power from the coax. The switch provides 10/100Mbps data and POE-af/at compliant power on the RJ45 port for an IP camera.

• The POC252-1CXP-1T Power over Coax Media Converter transmits data and injects power over coax for use with the POC252-1CX-1P. This is used to deploy a single IP camera on a length of coax cable and a multi-port BNC switch is not needed.

### Detaljer

- 1 Port (RJ45) with PoE-at support (upto Max. 25W)
- Auto-negotiation and auto-MDI/MDI-X
- IEEE 1901 communication Standard
- Wavelet-OFDM modulation
- 128-bit AES security encryption
- Daisy-chain (up to 3 devices on one link)
- Half-duplex back pressure and IEEE802.3x full-duplex pause-frame flow control
- Remote power up to 1Km
- Compatible with POC252 Switches and Head End Media Convertor

# POC252-1CX-1P

## Switch End 1-Port 10/100Base-Tx koppar + 1 BNC Koax-port med PoE (at) ej övervakningsbar mediakonverterare (-40~75 °C) – ström 48 VDC – väggmontering

## Tekniska specifikationer

### General

| | |
|---|---|
| Technology | IEEE1901 |
| Compatible with MCR rack | No |

### Connections


| | |
|---|---|
| Coax ports | 1 |
| Connector | BNC |
| RJ45 ports | 1 |
| Port type | 10/100 |
| Fault relay output | No |

### Electrical

| | |
|---|---|
| Power supply type | Via Power Over Coax |
| Redundant power | No |

### Physical

| | |
|---|---|
| Colour | Black |
| Mounting type | Wall mount |

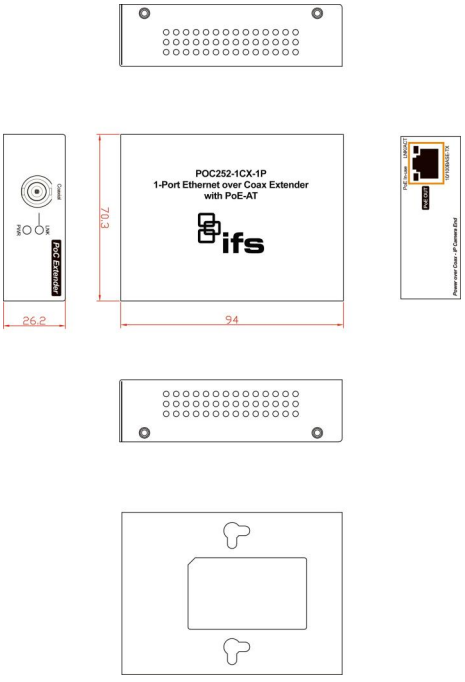


Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 20:20