
# ATS3500A-IP-MM-MK

**Kit ATS3500A-IP-MM including ATS1136 secure MF keypad**

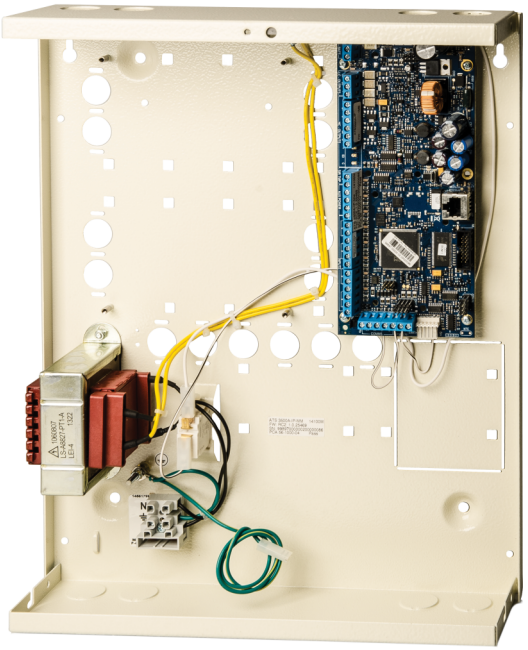

## Details

- 8 onboard zone inputs
- Max 128 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 8 areas
- Up to 2000 users (max 65532 with Door/Lift Controllers)
- Standard access control without additional door controllers
- Full Access control using CDC4 Door & Lift controllers
- EN50131 Security grade 3
- Multilingual, own language for each user
- Full diagnostics, local or remote
- Auto Arming - Schedules - Timed Outputs
- IP Alarm reporting to OH-NETREC receiver - Optional GPRS/3G/4G
- Integrated 10/100 Mb Ethernet connection
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Live and scheduled Panel Health Check through UltraSync for registered systems

# ATS3500A-IP-MM-MK

## Kit ATS3500A-IP-MM including ATS1136 secure MF keypad

## Technical specifications

### System

| | |
|---|---|
| Product line | Advisor Advanced |
| Product type | Integreret adgangskontrol |
| Panel type | Hybrid |
| Kit | Yes |
| No. of keypads / readers | 16 |
| Data Gathering Panels (DGP) | 15 |
| No. of alarm groups | 64 |
| Specified cable | WCAT52 / WCAT54 or equivalent |

### Inputs

| | |
|---|---|
| Max no. of inputs | 128 |
| Onboard inputs | 8 |
| Inputs plug-in expansion | 8 |

### Outputs

| | |
|---|---|
| No. of outputs | 128 |
| No. of onboard outputs | 5 |

### Area

| | |
|---|---|
| No. of areas | 8 |

### User/Cards

| | |
|---|---|
| Max. no. of users | more than 2000 |
| Users with name | 1000 |
| Max. no. of cards | 2000 to 65532 |
| Max. no. of PIN codes | 2000 to 65532 |

### Access control

| | |
|---|---|
| Standard doors on control panel | 8 |
| Door groups | 128 |
| Floor groups | 128 |
| Intelligent doors on 4-door DGPs | 48 |

### Communication

| | |
|---|---|
| Onboard transmission type | IP |
| Transmission extension | GSM, GSM/GPRS, GSM/GPRS/IP, PSTN |
| Databus type | RS485 |

### Event log

| | |
|---|---|
| Alarm event log | 14500 |
| Access event log | 10000 |

### Electrical

| | |
|---|---|
| Power supply type | 230 VAC |
| Power supply value | 230 VAC +10%, -15%, 50/60 Hz |
| Mainboard current consumption | 150 mA |
| Max system current | 1950 mA at 13.8 V ±0.2 V |
| Max aux power current | 1350 mA (depends on backup power needs) |
| Auto-reset fuses | 5 |
| Glass break fuses | 1 (mains power) |

### Physical

| | |
|---|---|
| Physical dimensions | 315 x 388 x 88 mm |
| Material | Stål (malet) |
| Housing | Średnia metalowa |

### Environmental

| | |
|---|---|
| Operating temperature | -10 to +55°C |
| Relative humidity | 95% noncondensing |
| Environmental Class | Class II, indoor |
| IP rating | IP30 |

### Regulatory

| | |
|---|---|
| EN50131 Grade | Lønklasse 3 |
| Compliancy | CE |
| Certification | CE |

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 7 May 2026 - 14:05