# KFP-CX3

## Painel Kilsen Convencional Deteção e Extinção 3 zonas



# KFP-CX3

## Painel Kilsen Convencional Deteção e Extinção 3 zonas

## Especificações técnicas

### General

| | |
|---|---|
| Maximum system capacity (device count) | bis zu 96 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 3 |

### Zone

| | |
|---|---|
| Maximum zone capacity | bis zu 3 |

### Physical


| | |
|---|---|
| Form factor | Mittel |
| Colour | Reinweiß (RAL 9010) |
| Mounting type | Oberflächenmontage |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN12094-1, EN54-13, EN54-2, EN54-4 |

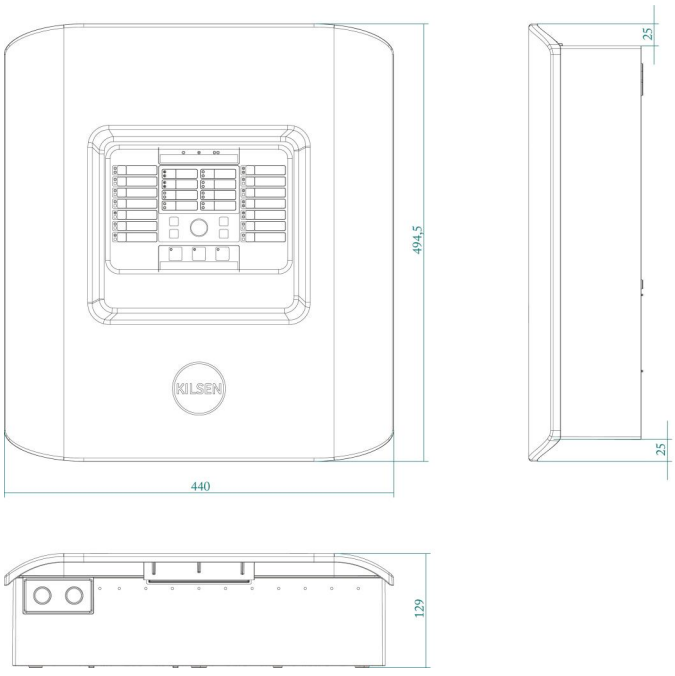


KIDDE COMMERCIAL

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57