2X-F1

Addressable Fire Panel - 1 Loop



2X-F1
Addressable Fire Panel - 1 Loop

Tekniska specifikationer

General

Maximum system capacity (device count)	up to 8192
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	up to 512

Physical


Form factor	Stor
Colour	Grigio (RAL 7035)
Mounting type	Montaggio a superficie

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

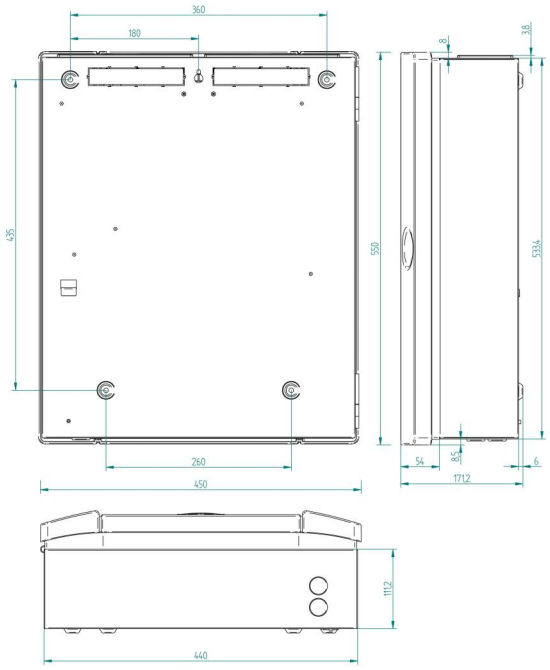

KIDDE COMMERCIAL

Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57