# 1X-X3E

## Enhanced Conventional Fire and Extinguishing Panel - 3 Zone



# 1X-X3E

## Enhanced Conventional Fire and Extinguishing Panel - 3 Zone

## Technische Spezifikationen

### General

| | |
|---|---|
| Maximum system capacity (device count) | hasta 1260 |
| Network size (nodes) | hasta 21 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 3 |

### Zone

| | |
|---|---|
| Maximum zone capacity | hasta 3 |

### Physical


| | |
|---|---|
| Form factor | Mittel |
| Colour | Gris (RAL 7035) |
| Mounting type | Montaje en Superficie |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN12094-1, EN54-2, EN54-4 |

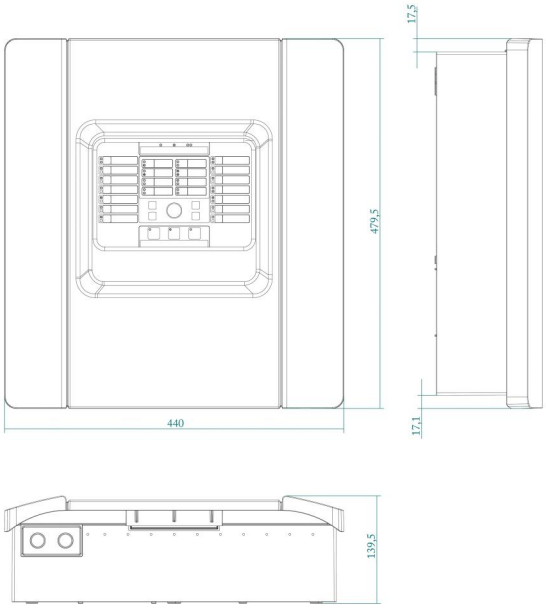


KIDDE COMMERCIAL

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.