# 1X-X3

## Conventional Fire and Extinguishing Panel - 3 Zone



# 1X-X3

## Conventional Fire and Extinguishing Panel - 3 Zone

## Spécifications techniques

### General

| | |
|---|---|
| Maximum system capacity (device count) | jusqu'à 96 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 3 |

### Zone

| | |
|---|---|
| Maximum zone capacity | jusqu'à 3 |

### Physical


| | |
|---|---|
| Form factor | Mittel |
| Colour | Gris (RAL 7035) |
| Mounting type | Montage en surface |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN12094-1, EN54-13, EN54-2, EN54-4 |

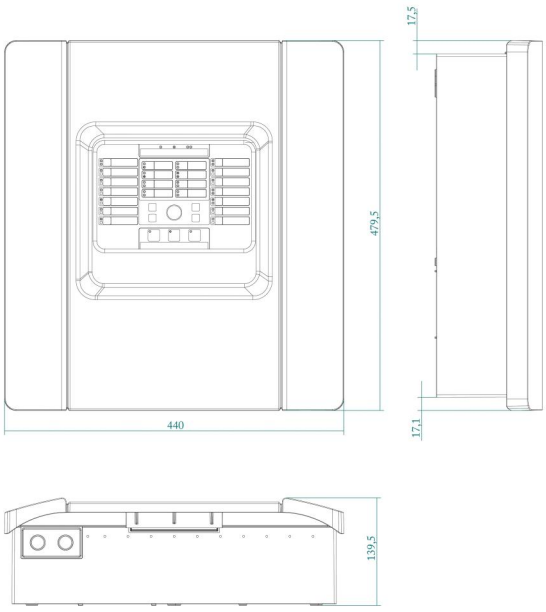


KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57