DD1012AM

12m Dual Radar/Pir Anti-Masking detector, 78°, 9 gordijnvelden 5,8Ghz. EN Grade 3



DD1012AM

12m Dual Radar/Pir Anti-Masking detector, 78°, 9 gordijnvelden 5,8Ghz. EN Grade 3

Technische specificaties

General

Technology	Double
Application type	Fixation murale
Anti masking	Yes
Pet immune	No
Camera	No
Pry-off tamper kit	Embarqué

Detection

Max. detection range	12 m
Microwave frequency (nom.)	5.8 GHz
Undercrawl protection	Yes
Alarm memory	Yes
Alarm time	3 secondes

Wired/wireless

Wired-wireless	Kablede

Inputs/outputs

Relay configuration	Valeurs EOL multiples
Remote control lines	Jour/Nuit, Test de fonctionnement

Physical

Colour	Hvid
Mounting height	1.8 à 3 m

Environmental

Environment	Indendør

Regulatory

EN50131 grade	Lønklasse 3

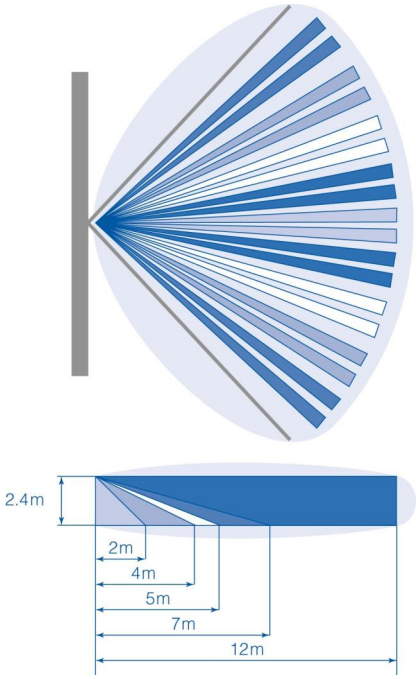

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57