DD1012AM

Detetor Dupla Tecnologia (PIR/µW) Anti Máscara, 9 cortinas, 12m

Patented Range Gated Radar Technology

Motion sensors of the DD1000 Series incorporate a KSG Fire & Security patented and unique range gated radar technology allowing the installer to define a clear borderline of the radar range as the radar is used to measure distance between the sensor and moving objects. Effectively the end-user will get rid of any nuisance alarms generated by movements outside the detection pattern.
Every motion sensor comes with 4 possible radar ranges selectable via dip switches allowing the detection pattern to be tailored according to the room where the motion sensor is installed.
The radar operates on 5.8GHz frequency and will not interfere with any WIFI networks.

PIR Technology in combination with patented mirror optics

Our patented optical mirror technology gives the advantage of gliding focus, which creates a continuous detection curtain from floor level up to installation height.
Within our DD1012 series we are using a dual element pyro generating 2 volumetric curtains for each of the 9 curtain sets.

Detection technologies working together

These dual tech motion sensors generate an alarm depending on what both technologies – range gated radar and PIR – saw within its detection coverage.
But our dual tech go beyond a simple “AND” function : it classifies the signals from each technology – range gated radar and PIR – to have the best alarm result without being sensitive for nuisance signal sources. This technology creates a uniform sensitivity in all course directions.

Ease and flexibility of installation

1. Tolerates wall angle deviation and different mounting heights.
2. Limited loss of coverage when objects are placed in the field of the PIR vision.
3. Easy range setting via dip switches of the range gated radar in order to tailor the detection pattern to your needs.
4. Multiple build-in End-Of-Line resistor values with “easy wiring” option available.
5. Plug-in connector.

Anti-masking (optical and radar)

The use of Active Infrared and radar technology results in a superior anti-masking functionality that supervises the motion sensor on the inside and outside. Radar verification prevents from having unwanted AM alarms caused by e.g. insects. In advanced setting the AM alarm is held until the effective source of the anti-masking (e.g. spray, tape,…) has been removed. Even partial masking – so going beyond the EN Grade III standard – will be detected when in advanced setting.



Detalhes

- Tecnologia patenteada de radar de alcance controlado
- Tecnologia PIR e Optica de espelhos pantenteada
- Anti-masking variant using Active Infrared and radar technology to protect against sabotage actions outside and inside of the motion sensor
- Anti-mascaramento através de tecnologia IV/MO activa para protecção contra sabotagem
- Auto-diagnóstico contínuo e automático para todas as tecnologias
- Modo Ecológico: Opção para desativar a tecnologia de radar, quando o sistema de segurança não está armado
- Holding several security approvals including EN Grade III and UL/ULc

Other members of the family

This family includes motion sensors with variants in detection range, two types of anti-masking masking technology and Pet Immunity. The consistent family aesthetics between the various models ensure a professional approach when installing different sensor types.

DD1012AM

Detetor Dupla Tecnologia (PIR/µW) Anti Máscara, 9 cortinas, 12m

Especificações técnicas

General

Technology	Double
Application type	Fixation murale
Anti masking	Yes
Pet immune	No
Camera	No
Pry-off tamper kit	Embarqué

Detection

Max. detection range	12 m
Microwave frequency (nom.)	5.8 GHz
Undercrawl protection	Yes
Alarm memory	Yes
Alarm time	3 secondes

Wired/wireless

Wired-wireless	Verdrahtet

Inputs/outputs

Relay configuration	Valeurs EOL multiples
Remote control lines	Jour/Nuit, Test de fonctionnement

Physical

Colour	Weiß
Mounting height	1.8 à 3 m

Environmental

Environment	Drinnen

Regulatory

EN50131 grade	Grad 3

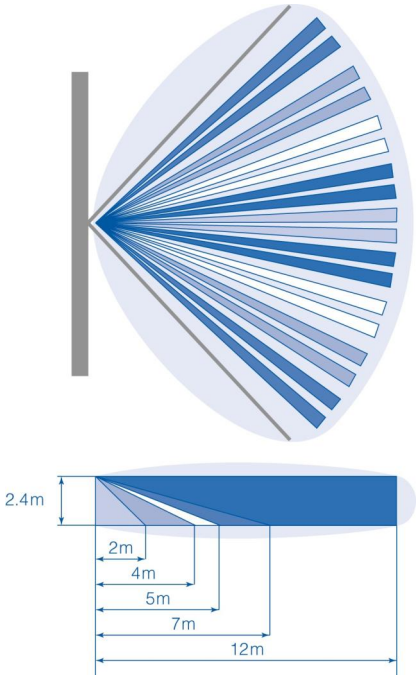

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57