
TCA-0066

Zweifach galvanisch ISO IS EEx ia IIC

Function

This isolated barrier is used for intrinsic safety applications. It supplies power to solenoids, LEDs, and audible alarms located in a hazardous area.
It is loop powered, so the available energy at the output is received from the input signal. The output signal has a resistive characteristic. As a result the output voltage and current are dependent on the load and the input voltage.
At full load, 10 V at 45 mA is available for the hazardous area application.

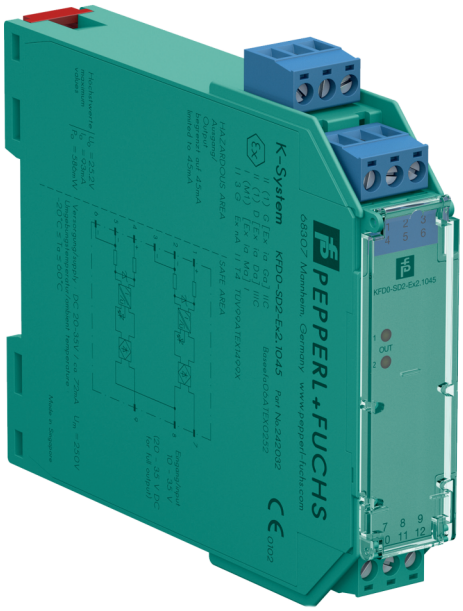

Einzelheiten

- 2-Kanal isolierte Barriere

TCA-0066

Zweifach galvanisch ISO IS EEx ia IIC

Technische Spezifikationen

Electrical

Power supply type	24 VDC

Physical

Mounting type	DIN-Hutschiene

Regulatory

Certification	UL
Standards	IEC/EN 61508

KIDDE GLOBAL SOLUTIONS

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.