NS3502-8P-2T-2S-V3

Switch Ethernet PoE+ gestionable de 8 puertos 10/100/1000Base-T + 2 puertos 10/100/1000 + 2 puertos 100/1000 SFP

Overview

For fast and efficient connectivity from the network edge to a backbone switch or server, the IFS 10-port Gigabit Ethernet Managed Switch features eight 10/100/1000Mbps Gigabit Ethernet ports with 2 100/1000Mbps SFP ports. The 2 SFP ports can support either 100Base-X or 1000Base-X through an SFP interface.

For efficient switch management, the Switch is easily programmable via a simple, yet powerful Web Interface. The switch can manage Port Speed Configuration, Port Link Aggregation, IEEE 802.1Q VLAN and Q-in-Q VLAN, Port Mirroring, Spanning Tree and ACL security. The switch includes advanced features such as Multicasting with IGMP snooping and query, QoS, broadcast storm and bandwidth control to enhance bandwidth utilization.

Engineered for Real-time Performance

This switch is designed with a high performance non-blocking switch fabric and provides wire-speed throughput to ensure optimum quality of service. The Switch classifies and prioritizes Layer 2 802.1p or Layer 3 IP TOS/DSCP traffic into four hardware queues that support strict or Weighted Round Robin (WRR) queuing algorithms. This functionality provides maximum allocation of limited network resources and guarantees best performance for real-time applications.

Full Power, Isolated per Port PoE

This Gigabit PoE Managed Switch provides optimized deployment and safe power management to PoE edge devices such as IP Surveillance cameras or access control panels. Full power PoE-af (15.4w) is provided to all 8-ports with no power sharing, and added port circuit protection isolates and prevents power interference between ports. In addition to standard IEEE 802.3af (15.4w), the IFS Gigabit PoE Managed Switch provides support for up to 7 ports of IEEE 802.3at (30w) PoE+.

Built-in Monitoring, Diagnostics and Trouble-shooting Tools

The Switch can be configured to monitor a connected PD (Powered Device) status in real-time via IP ping. If a PD (IP Camera or IP Access Reader) no longer responds to a ping, the switch will cycle PoE power on the port thus rebooting the PD back to operational status. This along with built-in cable diagnostics, and support for SNMP can greatly enhance the IT administrator's trouble-shooting and management abilities, saving time and labor while keeping network downtime to a minimum.



Detalles

- 10 puertos 10/100/1000Base-T RJ-45 con 8 puertos IEEE 802.3af / 802.3at PoE Injector
- Ranuras mini-GBIC/SFP de 2 puertos 100/1000Base-X, detección automática de tipo SFP
- Interfaz de consola para gestión y configuración básicas
- Gestión de línea de comandos basada en web, telnet, SSH, SSL y consola, gestión de seguridad de direcciones IP para evitar intrusos no autorizados
- Autenticación de acceso de usuarios RADIUS / TACACS
- Cumple las normas IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3af, IEEE 802.3at
- Admite autonegociación y modos half-duplex/full-duplex para todos los 10Base-T/100Base-TX y 1000Base-T.
- Evita la pérdida de paquetes con grupos de control de flujo de tramas de pausa IEEE 802.3x (full-duplex) y contrapresión (half-duplex), de 4K ID de VLAN
- Lista de control de acceso (ACL) basada en IP, lista de control de acceso basada en MAC, vinculación de direcciones MAC / IP de origen
- Control del ancho de banda de entrada/salida en cada puerto
- Admite IGMP Snooping v1, v2 y v3, modo de consulta IGMP para aplicación de medios multidifusión y registro de VLAN multidifusión.
- Fuente de alimentación interna
- Replicación de puertos para supervisar el tráfico entrante o saliente en un puerto determinado

NS3502-8P-2T-2S-V3

Switch Ethernet PoE+ gestionable de 8 puertos 10/100/1000Base-T + 2 puertos 10/100/1000 + 2 puertos 100/1000 SFP

Especificaciones técnicas

General

Fast ring	Nein
Storm control	Broadcast, Multicast
Security	802.1x, ACL, Conexión de puertos IP-MAC, RADIUS, Quelle MAC- / IP-Adressbindung, TACACS+
DHCP snooping	Yes
Fault relay output	Nein

Category

Category	Comercial
Management	Verwaltet
Managed	Ja (Layer 3 - Limited)
PoE	Yes

Physical ports

No. of ports	10
Port type	Gig
Speed	Gigabit
PoE/PoE+	8 puertos PoE/8 puertos PoE+
Fiber port	2
Supported SFPs	Series S20/S25, Series S30/S35
SFP speed	100/1000

Switch Performance

Switch fabric	24 Gbps
Throughput (Mpps)	17.76
Mac table	8 K
Jumbo frame support	9 K

Layer 2 Functions

Management interface	Consola, Web, Telnet, SNMP 1,2,3, acceso seguro SSH/SSL
IGMP snooping	255 Group, Snooping v1, v2, v3
IGMP query	Ja
VLAN, QoS	256, si
Access control list	123 entries

Electrical

PoE power budget	200 W
Redundant power	No
Power supply type	100 bis 240 VAC
Power consumption	320 W (Max)

Physical

Physical dimensions	330 x 200 x 44 mm (1U)
Net weight	2 kg
Colour	Schwarz
Material	Metall
Mounting type	Schreibtisch-basiert
Stackable	No

Environmental

Operating temperature	0 to +50°C
Storage temperature	-20 to +70°C
Environment	Drinnen

Standards Compliance

	IEEE 802.3 10Base-T
	IEEE 802.3u 100Base-TX/100Base-FX
	IEEE 802.3z Gigabit SX/LX
	IEEE 802.3ab Gigabit 1000Base-T
	IEEE 802.3ad Port trunk with LACP
	IEEE 802.3af Power over Ethernet
	IEEE 802.3at Power over Ethernet
	IEEE 802.3x Flow Control and Back Pressure
	IEEE 802.1d Spanning Tree Protocol
	IEEE 802.1w Rapid Spanning Tree Protocol
	IEEE 802.1s Multiple Spanning Tree Protocol
	IEEE 802.1p Class of Service
	IEEE 802.1Q VLAN Tagging
	IEEE 802.1x Port Authentication Network Control
	RFC 768 UDP, RFC 791 IP, RFC 792 ICMP
	RFC 793 TFTP, RFC 2068 HTTP
	RFC 1112 IGMP Version 1, RFC 2236 IGMP Version 2

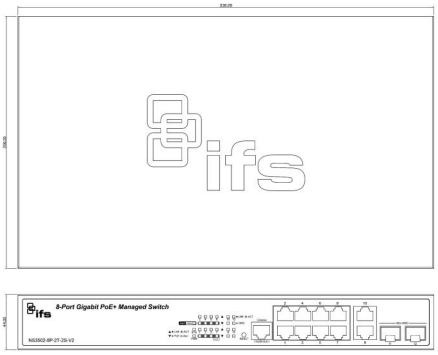

Como empresa innovadora, Kidde Global Solutions se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 12 November 2026 - 20:20