# 6630

## Détecteur plafond Comfortline 10m double technologie IRP/MW.

### Tailored to each security need

A complete sensor line offering the comfort to choose the right solution tailored to the risk level and environment. The 6536 ceilling mount model provides standard Passive Infrared (PIR) detection. The 6630 ceiling mount model combines PIR with microwave technology, offering dual detection for enhanced accuracy and reliability in challenging environments. For high-security areas, the 6630AM ceiling mount model incorporates anti-masking features, which prevent tampering or obstruction of the sensor, ensuring continuous protection.

### Mounting and design

The design of the Comfortline ceiling mount sensors emphasize aesthetics as well as functionality.  Its white glossy finish makes it blend seamlessly with modern interiors. The ceiling mount sensor variants provide full 360 degrees detection, ideal for open areas like lobbies, warehouses, or venues.

### Performance

The Comfortline sealed optics protect against dust, bugs and other contaminants, ensuring long-term reliability in various environments. Digital signal processing filters noise and reduces false alarms, enhancing detection accuracy. The sensors spherical optics provide consistent detection coverage, minimizing blind spots across heights between 2.4 to 4,0 meters.

### Configuration

The Comfortline includes selectable built-in EOL resistors that simplify wiring and ensure compatibility with most alarm panels. The sensor status LED indicators can be turned on or off locally or remotely, as well as its microwave and anti-mask detection controls, allowing flexibility based on security needs.

### Compliance and certification

The Comfortline meets the industries EN and INCERT Grade 2 and 3 standards. Being certified, the product demonstrates its commitment to quality, safety, and regulatory compliance, providing peace of mind to installers and end-users.



### Détails

- Détecteur plafond 10 m double technologie PIR/MW
- Traitement numérique du signal
- Lentille Fresnel de haute qualité
- Comptage d’impulsions
- Contrôles de la LED d’état et de la détection micro□onde
- Résistances EOL intégrées et sélectionnables
- EN & INCERT Grade 2

# 6630

## Détecteur plafond Comfortline 10m double technologie IRP/MW.

## Spécifications techniques

### General

| | |
|---|---|
| Technology | Dual |
| Application type | Ceiling mount |
| Anti masking | No |
| Pet immune | No |
| Detector start-up time | 60 s |
| Microwave frequency | K-Band, 24.15-24.25 GHz |

### Detection

| | |
|---|---|
| Detection range | 10 m 360 degrees |
| Target speed range | 0.3 to 3.0 m/s |
| Digital pulse count | 1 or 2 pulses to raise an alarm |

### Inputs/outputs

| | |
|---|---|
| Alarm relay characteristic | Normally closed, 100 mA at 30 VDC |

### Electrical

| | |
|---|---|
| Current consumption | Quiescent : 28 mA<br>Maximum : 48 mA |

### Physical

| | |
|---|---|
| Physical dimensions | 108 x 108 x 31 mm |
| Net weight | 90 g |
| Colour | White |
| Mounting height | 2.4 to 4.0 m |
| Housing material | 3 mm ASA |

### Environmental

| | |
|---|---|
| Operating temperature | -20 to +55°C |
| Storage temperature | -35 to +60°C |
| Relative humidity | 95% noncondensing |
| IP rating | IP30 |

### Regulatory

| | |
|---|---|
| EN50131 grade | Grade 2 |
| Certification | EN50131, INCERT, SBSC |

Coverage Pattern

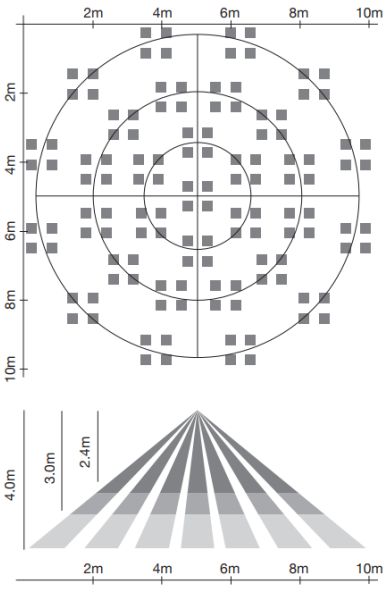


CADDX

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57