# TVR-1808-2T

## TruVision™ DVR 18 – Enregistreur vidéo hybride HD-TVI à 8 canaux, 2 To

### Product overview

The TVR18 Series is a versatile and feature-rich hybrid video recording solution, designed to support a seamless transition from legacy analog systems to modern high-resolution surveillance. The TVR-1808 offers a cost-effective option for recording up to 8 analog or HD analog cameras, making it ideal for small-scale installations.
As a true hybrid recorder, the TVR18 supports a wide range of camera formats including analog, HD-TVI, HD-CVI (up to 4 MP), HD-AHD (up to 5 MP), and IP cameras. This flexibility makes it an excellent choice for upgrading existing analog infrastructures, delivering a competitive, practical, and future-ready solution

### Easy to use

With built-in UltraSync connectivity, the TVR18 series simplifies remote access—no port forwarding or VPN configuration required. Integration with the UltraSync cloud platform enables seamless remote management via the TVRMobile app and TruVision Navigator software (version 9.4SP2 or newer), unlocking full access to UltraSync features and future enhancements.
Remote video viewing is intuitive and secure, while advanced analytics such as people and vehicle recognition on analog channels and supported TruVision IP cameras help users quickly identify relevant events.

### Intelligence on-board


The Intelligent Search feature enables rapid retrieval of relevant recordings from analog and HD analog cameras. The TVR18 also supports:
- Face recognition on up to 4 analog channels
- AI-based perimeter protection on up to 8 analog channels
These capabilities enhance situational awareness and reduce response times in critical scenarios.

### Flexible deployment

The TVR-1808 leverages open HD-TVI technology, supporting cameras up to 8 MP over existing coaxial cabling. It also maintains compatibility with standard analog cameras, allowing users to retain legacy equipment where appropriate.
All channels can be configured for IP cameras up to 4K (8 MP), making the TVR18 a truly hybrid solution. Support for H.265 encoding ensures efficient storage and bandwidth usage across both analog and IP streams.

### Applications

The TVR18 Series is ideal for upgrading small-scale analog systems in residential, retail, and small office environments, where high-quality video is essential but costly rewiring is not feasible. Its hybrid flexibility and intelligent features make it a smart investment for scalable security.

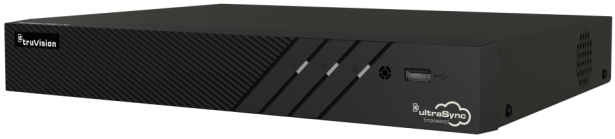


### Détails

- Système Linux embarqué avec configuration plug-and-play (prête à l'emploi)
- Compatible caméras analogiques, HD-TVI, HD-AHD, HD-CVI et IP
- Gestion flexible des canaux : 8 analogiques + 8 IP ou 16 IP (canaux analogiques désactivés)
- Prend en charge les caméras HD-TVI et IP jusqu'à une résolution de 8 MP (4K)
- Stockage interne de 2 To avec enregistrement en temps réel en Full HD
- Multiples sorties vidéo : HDMI, VGA et BNC
- Support du cloud UltraSync permettant un accès distant sans configuration de redirection de ports
- Analyses avancées : détection personnes/véhicules sur canaux analogiques et IP (jusqu'à 8), reconnaissance faciale (jusqu'à 4 canaux analogiques)
- Compatible caméras IP tierces via ONVIF Profile S
- Intégration des systèmes intrusion IP Aritech via SIA/XSIA
- Compatible clavier IP TVK-610
- Contrôle via coaxial (CoC) des caméras TruVision HD-TVI fixes et dômes PTZ
- Permet la réutilisation du câblage coaxial existant pour caméras HD-TVI, HD-AHD et HD-CVI
- Accès via navigateur, OSD, application TVRMobile (iOS/Android) et logiciel TruVision Navigator
- Possibilités d'intégration externe via SDK

# TVR-1808-2T

## TruVision™ DVR 18 – Enregistreur vidéo hybride HD-TVI à 8 canaux, 2 To

## Spécifications techniques

### General

| | |
|---|---|
| Technology | Analog, HD-TVI analog, IP |
| Operating system | Embedded Linux |
| Rack mountable | Yes |

### Video/audio input

| | |
|---|---|
| Camera channels | 8 |
| Analog camera channels | 8 |
| IP camera channels | 8 or 16 (with all analog channels disabled) |
| Max. bandwidth per channel | Analog: up to 8 Mbps (main stream) / up to 3 Mbps (sub stream) IP: follow capacity of IP camera but will not exceed 16 Mbps |
| Camera bandwidth | 256 Mbps (combined in/out) |
| Audio compression | G.711 |
| Max. analog audio In | 4-ch, RCA (2.0 Vp-p, 1 kOhm) |
| Supported video compression standards | H.264, H.264+, H.265, H.265+ |
| Supported video streaming standards | Onvif |

### Local viewing

| | |
|---|---|
| HDMI output | 1 |
| HDMI version | 1.4 |
| VGA output | 1 |
| BNC output | 1 |
| Max. local output resolution | 4K |
| Synchronous playback OSD (channels) | Up to 8 channels |
| Reverse playback OSD (channels) | 1 channel |

### Remote viewing

| | |
|---|---|
| Total available viewing bandwidth | Combined in and out bandwidth of 256 Mbps |
| Max. live viewing streams | 128 |
| Max. playback viewing streams | 32 |
| Max. simultaneous playback web browser | Up to 8 channels |
| UltraSync support | Yes, embedded |
| Software compatibility | TruVision Navigator, TVRmobile |
| Browser compatibility | Google Chrome, Microsoft Edge, Mozilla Firefox, Safari |

### Storage

| | |
|---|---|
| Storage capacity | 2 TB |
| SATA interfaces | 2 |
| Max. capacity per SATA HDD (TB) | 10 TB |
| Recording modes | Continuous, Event, Manual |
| External storage | NAS |
| Maximum recording resolution | 4K/8MP (IP, HD-TVI, HD-CVI), 5MP (HD-AHD) |

### Networking

| | |
|---|---|
| Network interface cards (NIC) | 1 |
| NIC type | RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| DNS support | DDNS, ezDDNS, No-IP |
| HTTPS support | Yes |

### External interfaces

| | |
|---|---|
| USB interface back | 1 |
| USB interface front | 1 |
| Serial interface | RS-485 |
| Alarm inputs | 8 |
| Alarm outputs | 4 |
| Max. analog audio outputs | 1 |

### Electrical

| | |
|---|---|
| Power supply value | 12 VDC (external PSU included) |
| Power consumption without HDD (W) | Less than 40 W |

### Physical

| | |
|---|---|
| Physical dimensions | 385 x 315 x 52 mm (W x D x H) |
| Net weight | 1.78 kg |
| Colour | Black |

### Environmental

| | |
|---|---|
| Operating temperature | -10 to +55ºC<br>14 to 131ºF |
| Relative humidity | 10 to 90% |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS, UKCA, UL, WEEE |

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 20:20