
# CDC4-MBC

**Intelligent 4-8 Door Controller with 12V PSU motherboard card**

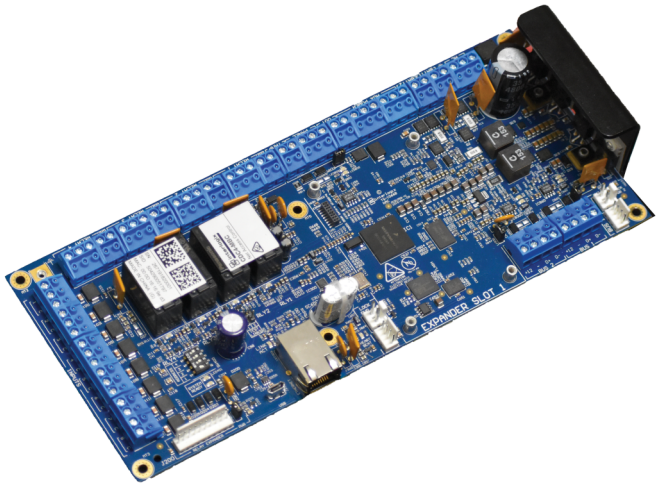


## Details

- Real time alarm & access control on 4-8 doors per controller
- Complete database for offline operation
- Up to 12 CDC4 door controllers providing 48 to 96 intelligent doors
- Full access control features: interlocking, user count, high secure users, anti-passback with regional
- Up to 32 readers per CDC4 and 6 per door
- Two local databuses with configurable protocol
- Supporting Secure readers, OSDP readers and wireless locks
- On board inputs, door relays, IP connection and expansion options
- Extended mode operation: access control users managed by Advisor Management
- Anti-passback between all door controllers in standard mode connected to Advisor Advanced

# CDC4-MBC

## Intelligent 4-8 Door Controller with 12V PSU motherboard card

## Technische specificaties

### General

| | |
|---|---|
| Expander type | Dørstyring |
| Product line | Advisor Advanced, Axon |
| Connection type | RS485 databus connection (to Advisor Advanced) and IP (to Advisor Management) |
| Compatibility | Advisor Advanced (not Advisor Master) |
| Max. distance from panel | 1.5 km using advised cable |
| Max. per panel | Depending on intrusion panel |
| Specified cable | WCAT52/54 or equivalent |

### System

| | |
|---|---|
| Users | Up to 65532 |
| PIN codes | All |
| Door groups | 128 - 50,000 |
| Timezones / holidays | 24 - 1000 |
| Addressing | Mikroprzełączniki |
| End-of-line resistor | Selectable |

### Inputs

| | |
|---|---|
| Total | 32 for intrusion use |
| Onboard | 8 |
| Expandable | 24 for intrusion use |

### Outputs

| | |
|---|---|
| Total | 16 for intrusion use |
| Onboard | 4 |
| Expandable | 8 |
| Type of outputs | Relays/Open Collector |
| Siren outputs | 1 |

### Backup

| | |
|---|---|
| Battery type | 7 - 26 Ah |
| Dynamic battery testing | Supported |

### Electrical

| | |
|---|---|
| Operating voltage | +12Vdc |
| Power supply type | 220/230 VAC |
| Power supply value | 12Vdc |
| Power consumption | 251 mA (incl Ethernet) |
| Integrated power supply | Yes |

### Physical

| | |
|---|---|
| Physical dimensions | 409 x 593 x 112 mm |
| Colour | Beige |
| Material | Metal |

### Environmental

| | |
|---|---|
| Operating temperature | 0 to +50°C |
| Storage temperature | −20 to +80°C |
| Relative humidity | 93% noncondensing |
| Environment | Indendør |
| IP rating | IP31 |

### Regulatory

| | |
|---|---|
| Compliancy | CE |
| Certification | CE |

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57