TVC-5712

Kamera standardowa IP TruVision, H.265, 4MP, Super Low Light, WDR, True D/N, Auto Back Focus, Audio, Alarm, BNC, gniazdo micro SD/SHDC, Inteligencja, PoE

Opis

Kamery IP TruVision serii 7 z funkcjami inteligentnych zdarzeń, dostępnymi w rozdzielczościach 2, 4, 8 i 12 MP, zapewniają obrazy wysokiej jakości dzięki bardzo wysokiej czułości na światło i ulepszonemu przetwarzaniu obrazu. Bogaty zestaw funkcji sprawia, że te kamery są idealnym wyborem do wymagających zastosowań związanych z bezpieczeństwem, nadzorem i monitorowaniem.

Kamery obsługują do 10 konfigurowalnych strumieni wideo, które umożliwiają użytkownikom optymalizację możliwości zdalnego podglądu na żywo z kamery przy jednoczesnym kontrolowaniu wykorzystania przepustowości. Oprócz zgodności z innymi produktami TruVision i oprogramowaniem VMS innych firm, kamery obsługują również nagrywanie na serwerze NAS lub zapis na lokalnej karcie MicroSD w celu ochrony danych w przypadku przerw w działaniu sieci.

Ulepszone funkcje wbudowanej inteligencji wideo wykraczają poza standardowe wykrywanie zdarzeń, umożliwiając operatorom otrzymywanie powiadomień o zdarzeniach w czasie rzeczywistym i skracają czas potrzebny na badanie po incydencie.

Kamerę można zainstalować w zewnętrznej obudowie TVC-OH3-HT ze zintegrowanym IR, sterowanym przez złącze RS485 kamery.



Szczegóły

- Maksymalna rozdzielczość: 2560 x 1440
- Kompresja H.265, H.264 i MJPEG
- 10 niezależnych konfigurowalnych strumieni wideo
- Profile ONVIF S, G i T
- Zaawansowana analityka wideo (VCA)
- Wide Dynamic Range do 140 dB
- Nagrywanie na opcjonalną kartę SD do 256 GB

TVC-5712

Kamera standardowa IP TruVision, H.265, 4MP, Super Low Light, WDR, True D/N, Auto Back Focus, Audio, Alarm, BNC, gniazdo micro SD/SHDC, Inteligencja, PoE

Specyfikacja techniczna

General

Technology	IP
Video standard	NTSC, PAL
Image settings	De-Fog, Electronic Image Stabilization, Hallway View, Mirror
Privacy masking	8 zones
Video output	BNC (for installation only)
Software compatibility	Milestone XProtect, OnGuard, TruVision Navigator, TVRmobile, UltraView, Web Browser

Camera

Sensor size	1/1.8"
Max. resolution	4 MP
Sensor scan	Progressive
Sensor type	CMOS
Shutter time	1 to 1/100,000 s

Lighting performance

WDR type	True WDR
WDR	140 dB
Digital noise reduction	3D DNR
Day/night	True Day/Night
Motorized IR cut filter	Yes
Color sensitivity	Color: 0.002 Lux @ (F1.2, AGC ON) B/W: 0.0002 Lux @ (F1.2, AGC ON)
B/W trigger	Auto/Schedule/Triggered by alarm in

Encoding

Video streams	10
Main stream compression	H.264, H.265
Sub stream compression	H.264, H.265, MJPEG
Third stream compression	H.264, H.265, MJPEG
Video bit rate	32 to 16 Mbps
Main stream resolutions	1280 x 720 (XVGA), 1920 x 1080 (1080p), 2560 x 1440
Sub stream resolutions	640 x 480 (VGA), 704 x 576 (4CIF)
Third stream resolutions	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p), 640 x 480 (VGA), 704 x 576 (4CIF)
Max. resolution @ fps	2560 x 1440 @ 25/30 fps

Lens

Lens type	C/CS mount lens to be ordered separately
Auto iris	Yes

Network

Network interface	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Integration	CGI, ISAPI, ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Supported network protocols	802.1x, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP

Audio

Audio compression	G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, MP3, PCM
Audio in	1 line in/mic.in
Audio out	1 line out

Alarm I/O

Alarm inputs	2
Alarm outputs	2 outputs (24 VAC/VDC, 1A max)
Alarm I/O connection	Terminal blocks

Storage

Local storage support	Yes
Local storage type	Built-in Micro SD/SDHC/SDXC card slot
Max. SD card capacity	256 GB

Video intelligence

Alarm trigger	HDD error, HDD full, Invalid login, IP address conflict, Network disconnected
ROI	Up to 4 fixed regions for one of 5 the first streams Dynamic region for face tracking
Smart event	Advanced motion detection, Audio exception detection, Defocus, Face detection, Intrusion detection, Line crossing detection, Object removal detection, Region entrance detection, Region exiting detection, Scene change detection, Unattended baggage detection

Electrical

Operating voltage	12 VDC is recommended, 10 to 48 VDC, 24 VAC is recommended, 15 to 36 VAC, two-core terminal block PoE (802.3af, class 3), reverse polarity protection
Power consumption	12 VDC, 0.65 A, max. 7.6 W; 24 VAC, 0.55 A, max. 7.6 W; PoE (802.3af, 36 V to 57 V), 0.1 A to 0.3 A, max. 7.6 W, class 3 With external load connected to camera power output: 12 VDC, 0.8 A, max. 10 W; 24 VAC, 0.7 A, max. 10 W; PoE (802.3af, 36 V to 57 V), 0.1 A to 0.3 A, max. 10 W, class 3

Physical

Physical dimensions	142.6 x 69.8 x 68 mm 5.61 x 2.75 x 2.68 in.
Net weight	730 g 1.61 lb.
Colour	Black
Form Factor	Box

Environmental

Environment	Indoor
Operating temperature	-30 to +60°C -22 to +140°F
Relative humidity	<95% (non-condensing)


Regulatory

Compliancy	CE, FCC, REACH, RoHS, UL, WEEE

TVC-5712

Kamera standardowa IP TruVision, H.265, 4MP, Super Low Light, WDR, True D/N, Auto Back Focus, Audio, Alarm, BNC, gniazdo micro SD/SHDC, Inteligencja, PoE

Unit: mm

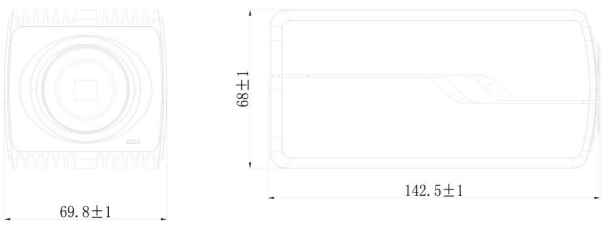

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57