# 2X-F1

## Addressable Fire Panel - 1 Loop



# 2X-F1
## Addressable Fire Panel - 1 Loop

## Spécifications techniques

### General

| | |
|---|---|
| Maximum system capacity (device count) | até 8192 |
| Network size (nodes) | até 64 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 1 |

### Zone

| | |
|---|---|
| Maximum zone capacity | até 512 |

### Physical


| | |
|---|---|
| Form factor | Groß |
| Colour | Cinzento (RAL 7035) |
| Mounting type | Montagem em superfície |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-21, EN54-4, VdS |

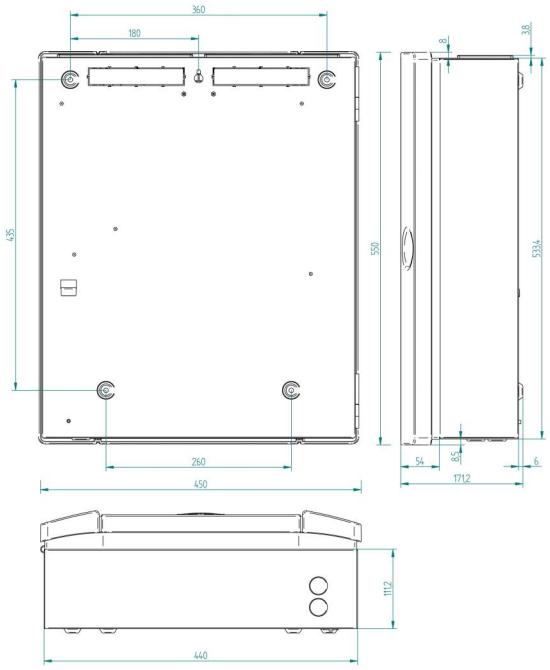


En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57