2X-F1

Addressable Fire Panel - 1 Loop



2X-F1
Addressable Fire Panel - 1 Loop

Specifiche tecniche

General

Maximum system capacity (device count)	até 8192
Network size (nodes)	até 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	até 512

Physical


Form factor	Stor
Colour	Cinzento (RAL 7035)
Mounting type	Montagem em superfície

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

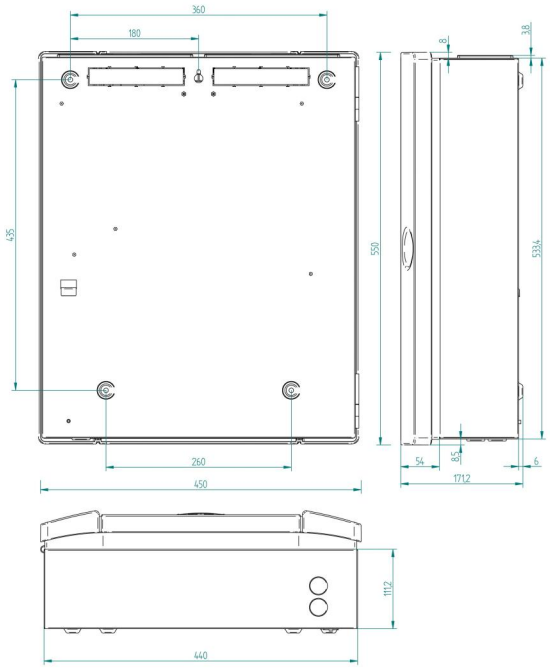

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57