2X-F1

Addressable Fire Panel - 1 Loop



2X-F1
Addressable Fire Panel - 1 Loop

Technische specificaties

General

Maximum system capacity (device count)	até 8192
Network size (nodes)	até 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	até 512

Physical


Form factor	Stor
Colour	Cinzento (RAL 7035)
Mounting type	Montagem em superfície

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

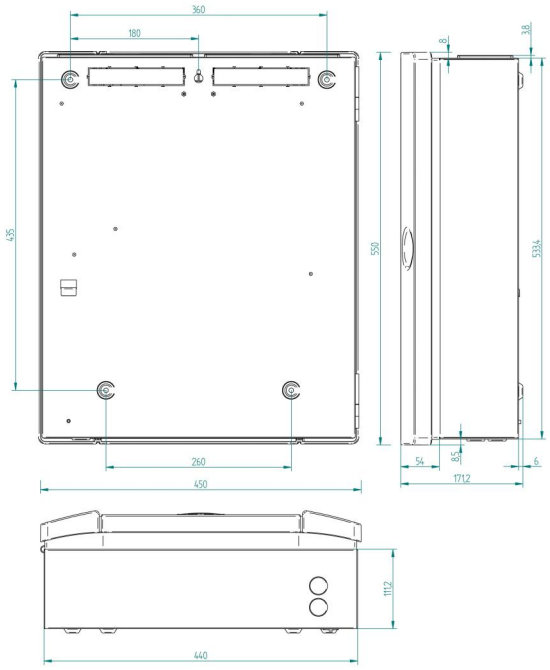

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57