1X-X3E

Enhanced Conventional Fire and Extinguishing Panel - 3 Zone



1X-X3E

Enhanced Conventional Fire and Extinguishing Panel - 3 Zone

Technische Spezifikationen

General

Maximum system capacity (device count)	bis zu 1260
Network size (nodes)	bis zu 21

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	bis zu 3

Physical

Form factor	Mittel
Colour	Grå (RAL 7035)
Mounting type	Ytmontering

Environmental

Environment	Drinnen

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-2, EN54-4

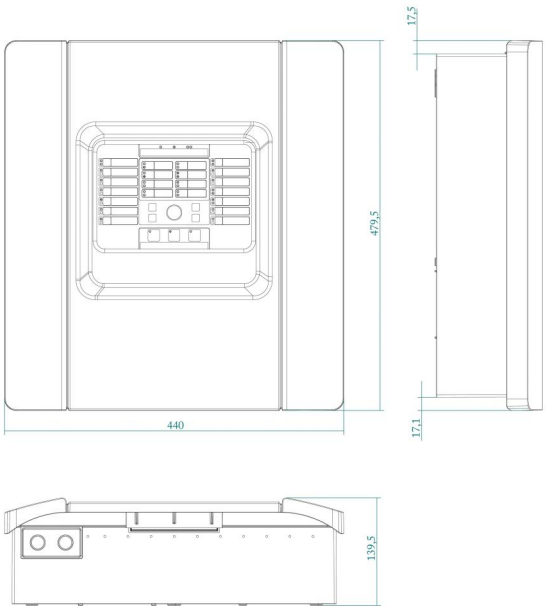

KIDDE COMMERCIAL

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.