1X-X3E

Enhanced Conventional Fire and Extinguishing Panel - 3 Zone



1X-X3E

Enhanced Conventional Fire and Extinguishing Panel - 3 Zone

Specifiche tecniche

General

Maximum system capacity (device count)	jusqu'à 1260
Network size (nodes)	jusqu'à 21

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	3

Zone

Maximum zone capacity	jusqu'à 3

Physical

Form factor	Medium
Colour	Grå (RAL 7035)
Mounting type	Ytmontering

Environmental

Environment	Indendør

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN12094-1, EN54-2, EN54-4

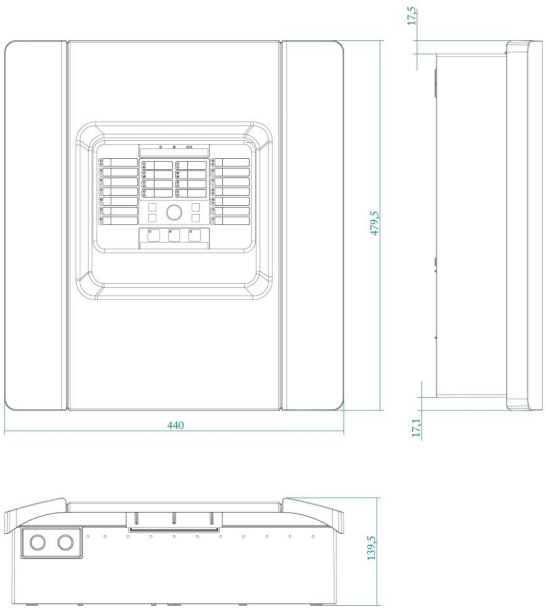

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57