KIDDE™ COMMERCIAL

KFP-CF2

Conventional Fire Panel - 2 Zone



KFP-CF2

Conventional Fire Panel - 2 Zone

Specifiche tecniche

General

Maximum system capacity (device count)	jusqu'à 2048
Network size (nodes)	jusqu'à 32

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	jusqu'à 2

Input

Input quantity	2

Physical

Form factor	Lille
Colour	Ren vit (RAL 9010)
Mounting type	Ytmontering

Environmental

Environment	Indendør

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-4

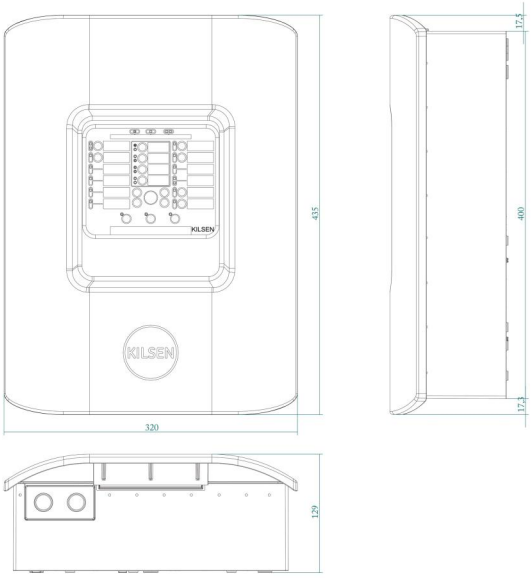

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57