# KFP-CX3

## Conventional Fire and Extinguishing Panel - 3 Zone



# KFP-CX3

## Conventional Fire and Extinguishing Panel - 3 Zone

## Technische specificaties

### General

| | |
|---|---|
| Maximum system capacity (device count) | bis zu 96 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 3 |

### Zone

| | |
|---|---|
| Maximum zone capacity | bis zu 3 |

### Physical


| | |
|---|---|
| Form factor | Medium |
| Colour | Ren vit (RAL 9010) |
| Mounting type | Ytmontering |

### Environmental

| | |
|---|---|
| Environment | Indendør |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN12094-1, EN54-13, EN54-2, EN54-4 |

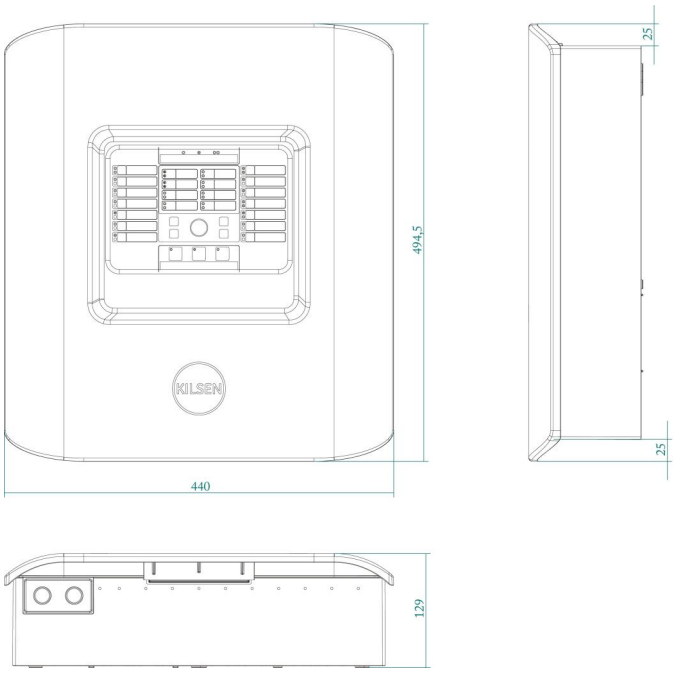


KIDDE COMMERCIAL

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57